





# Do it yourself

Do it yourself

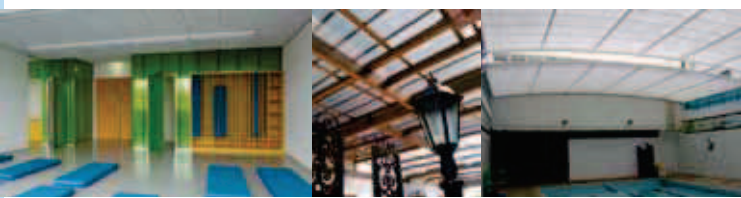

Do it yourself



- Multi Wall Sheets  
Hohkammerscheiben
- Multi Function Panels  
Multi-Funktions- Paneele
- U-Panels  
U-Paneele

## Do it yourself

### Panels

Panels are connected via the tongue and groove joint to construct walls and roofs of varying sizes. With minimal alloy components the systems are both fast and easy to install, thus ideal for home DIY.


### Advantages

- Polycarbonate is a crystal clear, high impact thermoplastic
- Temperature resistance from -40 to +115°C, temporarily up to 130°C
- Unchanged impact resistance within these temperatures
- good long term performance through UV protection
- 10 years warranty against yellowing - ageing - hail stone
- translucent with excellent thermal properties

### Applications

- Facade cladding and glazing
- Winter gardens
- Conservatories
- Roofing constructions
- Pergolas
- Light-bands
- Canopies
- Interior applications
- Carports


333	Panel	Up-value W/m <sup>2</sup> K**	Weight kg/m <sup>2</sup>	Building width (mm)	Thickness (mm)
	2333-16-4	approx. 2.1 W/m <sup>2</sup> K	approx. 2.4	333 +/- 1%	16
	2333-20-4	approx. 2.0 W/m <sup>2</sup> K	approx. 2.6	333 +/- 1%	20

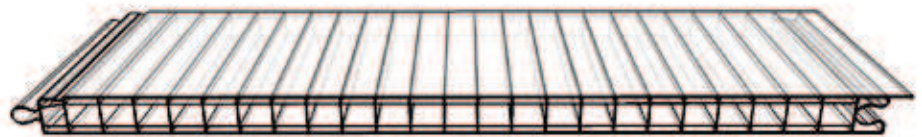

#### PC 2333-16-4

Colours  
Standard: crystal / opal


Color version: from 300 m<sup>2</sup>

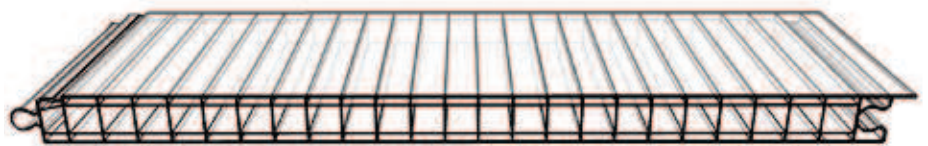

#### PC 2333-20-4

Colours  
Standard: crystal / opal

Color version: from 300 m<sup>2</sup>

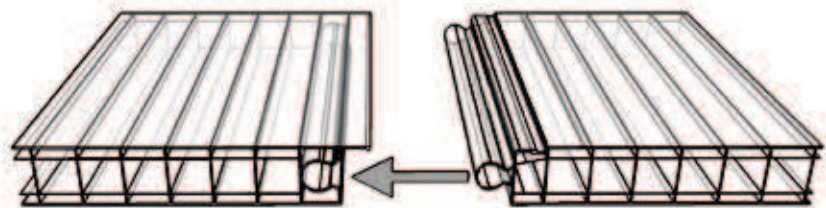

Tongue and groove joint

#### \*\* Up-values

All Up-values are approximate values / reference values.

